



KU3000 Thermoplastic Sprocket

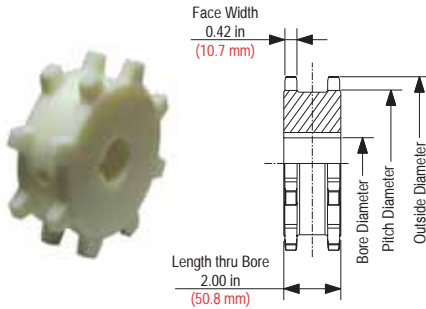

KUS3000 Split Thermoplastic Sprocket

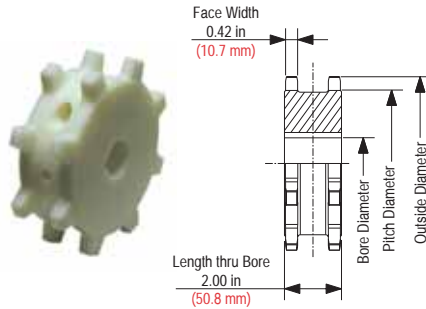

KU3000 Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
8	8	6.494	164.95	6.398	162.51	1-3/4	3	45	85	1	2-7/8	25	70	1	4	25	100	1.70	0.77
13	13	10.384	263.75	10.481	266.22	2	6-3/4	65	175	1	5-3/4	25	145	1	7	25	180	5.32	2.41

Shaft-ready round bore sprockets are shipped with keyway and setscrew. Idler bores are designed to spin freely on the shaft without keyways or setscrews.

KUS3000 Split Thermoplastic Sprocket Information

Number of Teeth		Pitch Diameter		Outside Diameter		Bore Diameter (Shaft-Ready)								Bore Diameter (Idler)				Approximate Weight	
						Round				Square				in		mm			
						min	max	min	max	min	max	min	max	min	max	min	max		
actual	effect	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
8	8	6.494	164.95	6.398	162.51	1-3/4	2-1/4	45	65	1	2	25	55	1	4	25	100	1.85	0.84
13	13	10.384	263.75	10.481	266.22	2	5-3/4	65	120	1	5-1/2	25	135	1	7	25	180	5.55	2.52

Shaft-ready round bore sprockets are shipped with keyway and setscrews. Idler bores are designed to spin freely on the shaft without keyways or setscrews.